


Geberit Monolith sanitary module for floor-standing WC, 101 cm



Example image

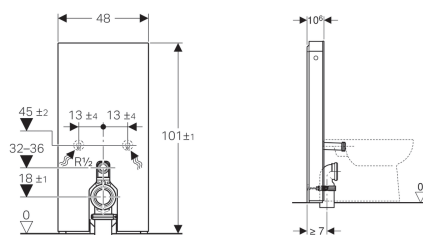

Application purposes

- For floor inlets
- For renovations, conversions and new buildings
- For wall inlets with an inlet height of 18 cm
- For floor-standing WCs with water inlet height 32–36 cm above floor in accordance with DIN EN 33
- For replacing low-level exposed cisterns
- For replacing floor-standing WCs with close-coupled exposed cistern
- For connecting Geberit AquaClean Sela floor-standing WC
- For connecting Geberit AquaClean WC enhancement solutions, with accessories
- For mounting on finished floors
- For installation in front of drywalls or solid walls

Characteristics

- Dual flush
- Compensation of dimensional tolerances possible
- Front cladding made of glass (ESG)
- Cistern, fully insulated against condensation
- Side cladding made of aluminium brushed
- Self-supporting

- Adjustable flush volume
- Water supply connection on the bottom
- Water supply connection on the left/right possible with accessories

Technical data

Flow pressure	0.1-10 bar
Flush volume, factory setting	6 and 3 l
Flush volume large, adjustment range	4.5 / 6 l
Flush volume small	3 l

Scope of delivery

- Water supply connection set with 2 angle stop valves, 1/2"
- Flush bend extension 160 mm
- Sleeve made of EPDM, \varnothing 44 / 55 mm
- Straight connector made of PE-HD, \varnothing 90 mm
- Connection bend 90° made of PE-HD, \varnothing 90 mm
- Adapter socket made of PE-HD, \varnothing 90 / 110 mm
- Base cover
- Fastening material for drywall
- Fastening material

Art. no.	Colour / surface	B	H	T
131.001.SI.5	white / glass	48 cm	101 cm	10.6 cm
131.001.SJ.5	black / glass	48 cm	101 cm	10.6 cm
131.001.SQ.5	umber / glass	48 cm	101 cm	10.6 cm
131.001.TG.5	sand / glass	48 cm	101 cm	10.6 cm
131.001.SL.5	mint / glass	48 cm	101 cm	10.6 cm

Accessories

- Lateral water supply connection set for Geberit Monolith sanitary module for WC